

Clipper M3

The Clipper M3 automatically packs product into tube netting, closing the netting with metal clips. The Clipper M3 is equipped with an automatic tube exchange to ensure a continuous supply of netting while the tube netting is refilled.

The Clipper M3 can be used with either extruded or knitted mesh products. The extensive tube diameter range allows facilities to package for industrial and consumer applications. At up to 55 bags per minute, packing facilities can keep up with the consumer demands.



FEATURES

- Flexible metal clipping system to allow for a wide range of wire thicknesses while maintaining the complete closure and label attachment on every bag
- Clipper mechanism has limited wear parts to ensure a long working life
- Accepts both extruded and knitted mesh materials
- Integrated labeler works with both wine glass and strip labels and can easily switch for different packages
- Automatic tube exchange to continue operation while tube netting is refilled

ADDITIONAL OPTIONS

- Thermo bar-code printers
- Net ruckers
- Intermittent discharge conveyor

PARTNER OPTIONS

- M8
- MD12
- MD16
- MD20 D
- M10
- M12V
- MD16 D
- M2i V

PACKAGE SIZE RANGE

- 1 to 5 pounds

PACKAGE DIMENSION

Tube Netting Diameter

- Min 6.2" (160mm)
- Max 9.8" (250mm)

CAPACITY / RATE

- 1 pounds up to 55 packages per minute*
- 5 pounds up to 40 packages per minute*

AIR CONSUMPTION

- 1.8 CFM**

POWER



- 400 Volt, 3 phase and ground

MOST COMMON PRODUCTS

- Onions
- Citrus Fruits
- Potatoes
- Garlic & Shallots
- Nuts

Custom testing is available for any product.

Clipper M3

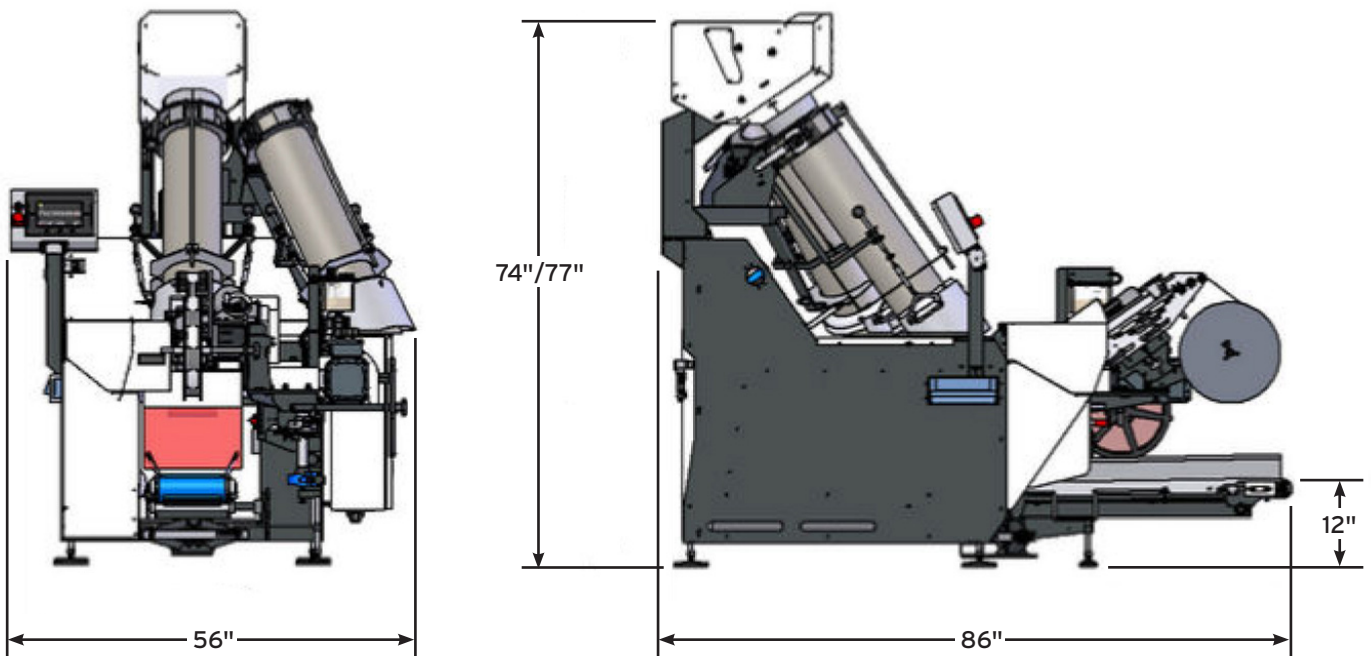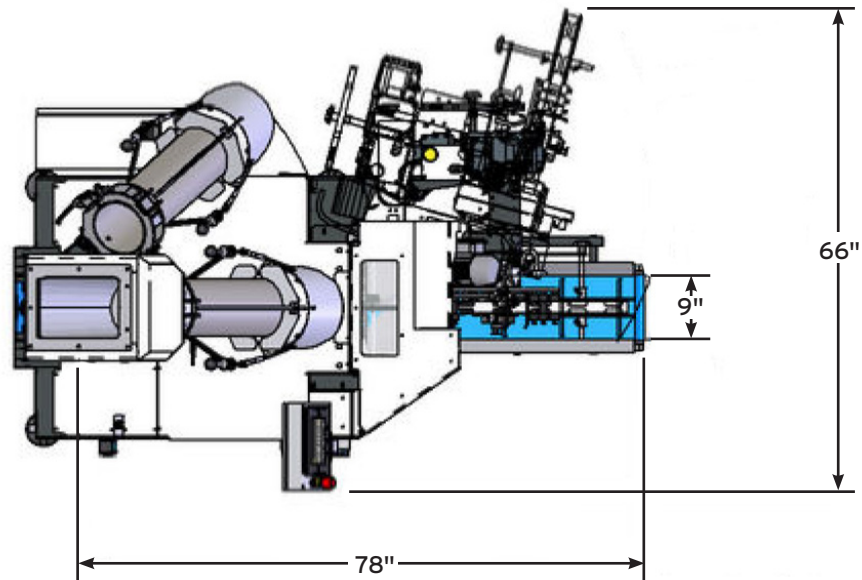

* Depends on product, infeed and discharge system.
** Actual air consumption will increase based on the chosen discharge system(s).
Measurements are rounded off to the nearest inch.